

5 / 12 Watt Power Module Series

ATS005A2 - F X X X P

O / P Voltage ←

ATS012A3 - F X X X P

O / P Voltage ←


Features :

- IEC/UL 62368-1 3rd Edition
- 100-240VAC Universal Input
- Regulated Output With Low Ripple Noise
- Safety Agency Requirements and EMI/EMS Certified
- Modified and Custom Design Available
- 1 Year Warranty

Model	O/P Voltage	O/P Current	Watt
ATS005A2-F033P	3.3V	1.25A	4.125W
ATS005A2-F050P	5.0V	1.00A	5.000W
ATS005A2-F120P	12.0V	0.50A	6.000W
ATS005A2-F150P	15.0V	0.33A	4.950W
ATS005A2-F240P	24.0V	0.23A	5.520W
Model	O/P Voltage	O/P Current	Watt
ATS012A3-F033P	3.3V	2.50A	8.25W
ATS012A3-F050P	5.0V	2.00A	10.00W
ATS012A3-F090P	9.0V	1.20A	10.80W
ATS012A3-F120P	12.0V	1.00A	12.00W
ATS012A3-F150P	15.0V	0.80A	12.00W
ATS012A3-F240P	24.0V	0.50A	12.00W

Input

Voltage	100-240VAC
Line Frequency	50-60Hz
Current	5W : 0.19A Max. / 12W : 0.31A Max.
Protection	Internal Primary Current Fuse

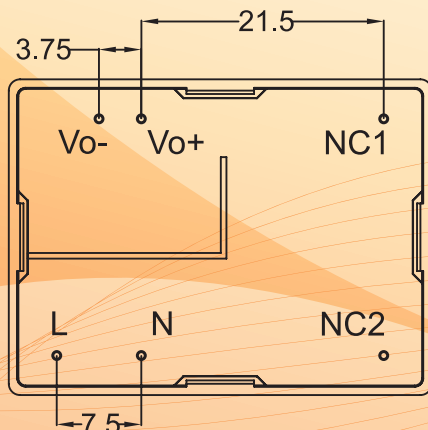

Output

Load Regulation	±5% (Typical)
Ripple & Noise	1% Vp-p Max. for Output Voltage@ Full Load
Transient Response	0.5mS for 50% Load Change Typical
Hold-up Time	8mS @ Full Load
Protection	Short Circuit Protection / Over Voltage Protection / Over Current Protection

Electrical

Topology	Switching Flyback
Dielectric Withstand	3000VAC Primary - Secondary
Leakage Current	0.25mA
Efficiency	DoE Level VI, ErP Stage 2
EMC Standards	EN55032
	EN61000-3-2,3
	EN55035
MTBF	300,000 Calculated Hours at 25°C, by Telcordia SR-332

Environmental

Operating Temperature	-20 to + 50°C
Storage Temperature	-20 to + 80°C
Relative Humidity	Operating : 20 to 80% RH
	Storage : 10 to 90% RH
Cooling	Natural Convection Cooling

Mechanical

Case Dimension	L 37.5 x W 28 x H 21 (mm)
Weight	5W : 26g (Ref.) / 12W : 40g (Ref.)