

Open Frame Dual Output 305 Watt Series

ATM305T - F X X X

O/P Voltage ←

Features :


- IEC/ANSI/AAMI ES60601-1 (Edition 3.2)
- EMC : IEC60601-1-2 (Edition 4.1)
- Means of Protection : 2 X MOPP
- IEC/UL 62368-1
- 100-240VAC Universal Input
- 305W With Fan
- Standby 5V / 1A
- On & Off Remote Control
- Regulated Output With Low Ripple Noise
- Modified and Custom Design Available
- 2 Years Warranty

Model	O/P Voltage	O/P Current		Watt	
		Convection	With Fan*	Convection	With Fan*
ATM305T-F120	12V	16.0A	25.0A	197W	305W
	5V	1.0A			
ATM305T-F240	24V	10.4A	12.5A	255W	305W
	5V	1.0A			
ATM305T-F480	48V	5.2A	6.25A	255W	305W
	5V	1.0A			

*With 11 CFM Fan

Input	
Voltage	100-240VAC
Line Frequency	50-60Hz
Current	3.6A-1.6A
Protection	Internal Primary Current Fuse

Derating Curve

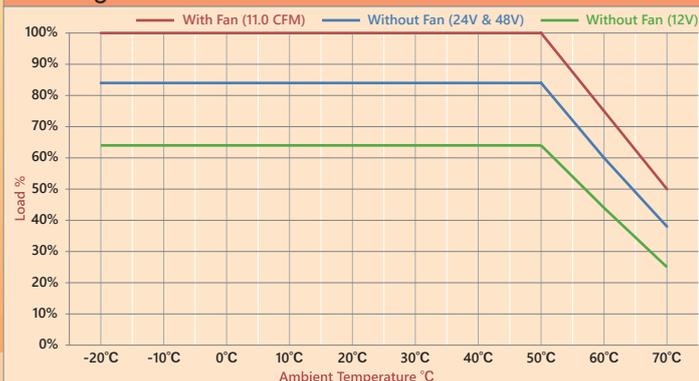

Output

Load Regulation	±5% (Typical)
Ripple & Noise	≤ 1% Vp-p @ Full Load
Transient(Dynamic) Response	0.5mS for 50% Load Change Typical
Start-up Time	< 3,000mS
Hold-up Time	≥ 10mS@ Full Load
Rise Time	< 50mS
Protection	Short Circuit Protection / Over Voltage Protection / Over Current Protection / Over Temperature Protection

Electrical

Topology	LLC
Dielectric Withstand	4,000VAC Primary - Secondary
Touch Current(Patient) Leakage Current	< 100µA
Earth Leakage Current	< 5mA
MTBF	300,000 Calculated Hours at 25°C , by Telcordia SR-332

Environmental

Operating Temperature	-20 to + 50°C
Storage Temperature	-20 to + 80°C
Operating Altitude	5,000M
Relative Humidity	Operating : 20 to 80% RH Storage : 10 to 90% RH
Cooling	ATM305T-F120: 197W with Convection Cooling ATM305T-F240: 255W with Convection Cooling ATM305T-F480: 255W with Convection Cooling 305W with Forced Cooling

Mechanical

Dimension	L 127 × W 76 × H 38 (mm) 5" x 3" x 1.5"
Weight	350g (Ref.)